
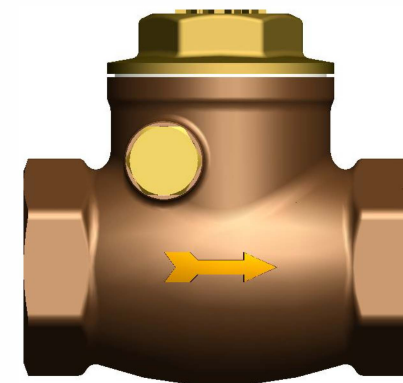
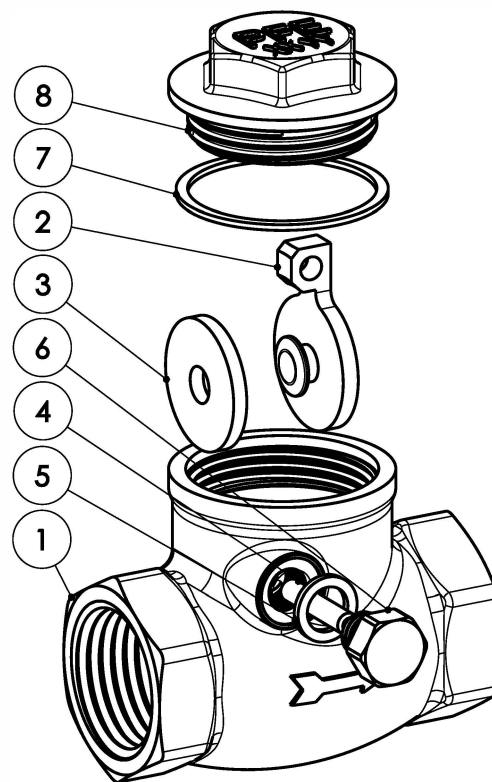
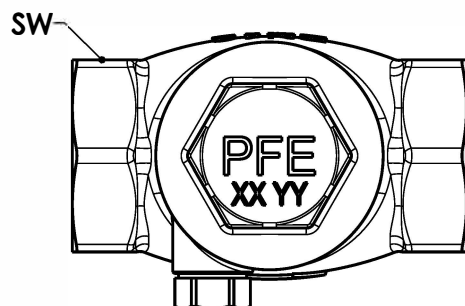


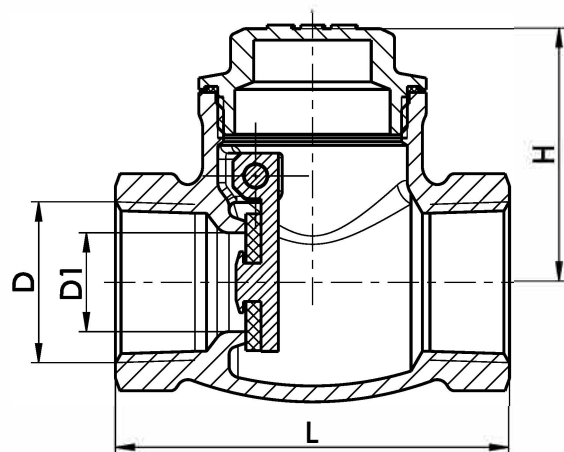

S135000S009-5000	2 1/2"	G2 1/2"	Ø 60±1	126±2	79.3±3	82±1
S135000S008-5000	2"	G2"	Ø 46±1	116±1.5	73.2±2.5	66±1
S135000S007-5000	1 1/2"	G1 1/2"	Ø 35±1	93.5±1.5	61.9±2.5	54±1
S135000S006-5000	1 1/4"	G1 1/4"	Ø 29±1	84.5±1.5	54.7±2.5	47.5±1
S135000S005-5000	1"	G1"	Ø 23±0.5	70.5±1	45.6±2	38±0.5
S135000S004-5000	3/4"	G3/4"	Ø 17±0.5	62±1	40.4±2	31.3±0.5
S135000S003-5000	1/2"	G1/2"	Ø 13±0.5	52±1	33.4±2	25.3±0.5
CODE	SIZE	D	D1	L	H	SW

NOTE:

- 1.Body in casting bronze;
- 2.Pressure rating:PN16;
- 3.Working temperature: 0° C to 90° C;
- 4.Threads:DIN ISO 228/1;
- 5.Production date:XX(Week)YY(Year)Adjustable;
- 6.Engraving or Laser marking XX YY depends on the quantity of one batch production;

8	S135000US-008	Cap	1	Brass	CW617N
7	S135000US-007	Washer 2	1	PTFE	
6	S135000US-006	Screw	1	Brass	HPb58-3A
5	S135000US-005	Washer 1	1	PTFE	
4	S135000US-004	Pin	1	Brass	HPb58-3A
3	S135000US-003	Gasket	1	NBR	
2	S135000US-002	Disc	1	Brass	CW617N
1	S135000US-001	Body	1	Bronze	C83600
NO.	PART CODE	PART NAME	QTY	MATERIALS	Specification

This drawing must not be communicated to third parties, not copied, nor abused in any other way.

Modification			
NO.	Changes	Name	Date

TOLERANCES UNLESS OTHERWISE SPECIFIED				Surface	Scale
Dimensions: ±		mm	Angle: ±	weight	1:1
PRODUCT OR ASSEMBLED PART HAS TO MEET REQUIREMENTS OF STANDARD(S)				Material	Unit
Drawing: MY	Name	Date	Drawing Name.	Check valve	
Approved: ZHANG		29/09/2022			
Code No.				Revision	Format
S135000S-5000				A/0	A/4

TRINNITY
DIE MARKE FÜR DAS FACHHANDWERK